


LGMG

SR0818E

ELECTRIC RT SCISSOR LIFT

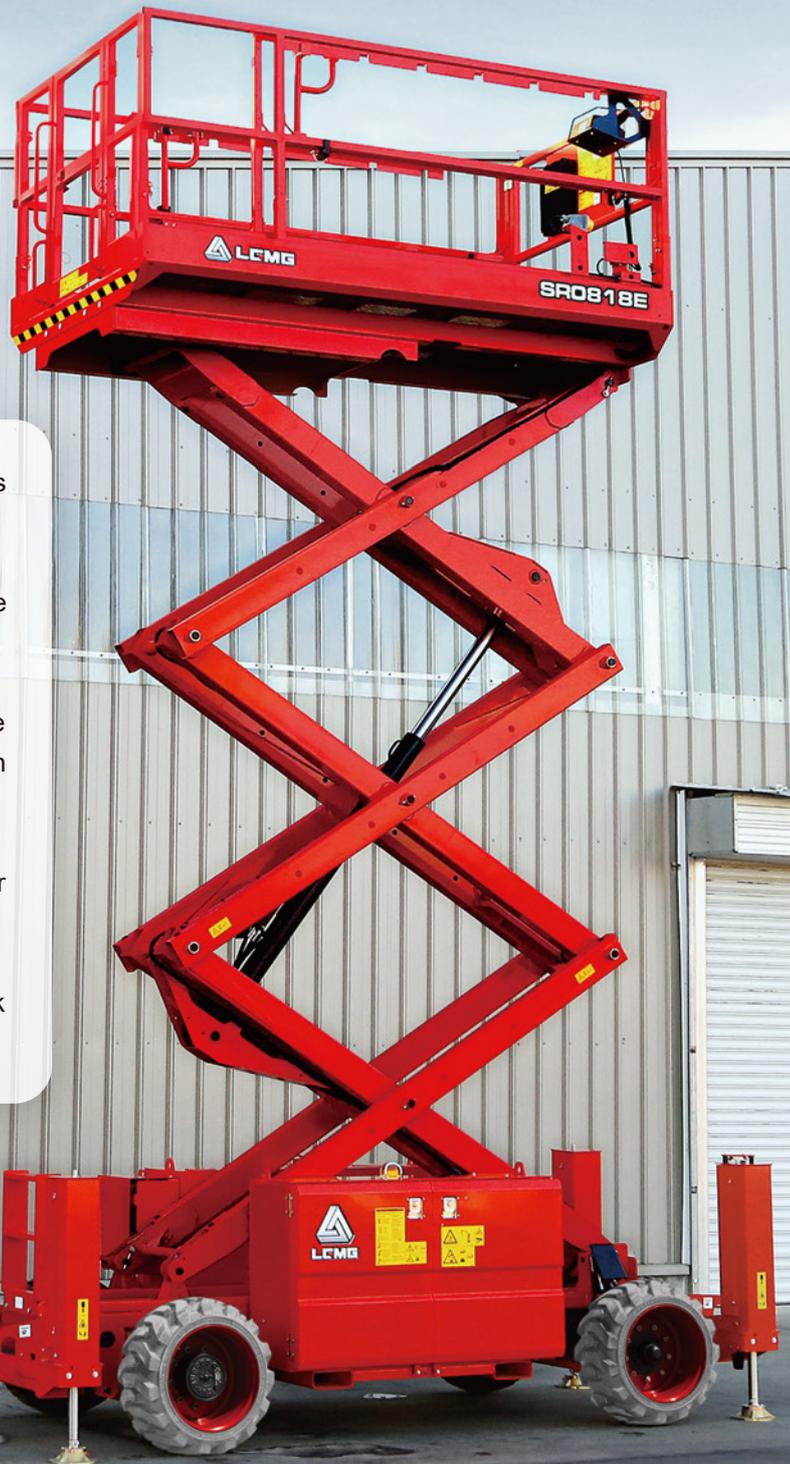

- The large platform with high capacity maximizes productivity.
- Battery powered, zero emission and quiet drive mean this machine is environmentally friendly.
- Equipped with oscillating axles that provide excellent performance in soft and rough terrain conditions.
- Optional hydraulic outriggers deliver a better solution on uneven ground.
- Intelligent self-diagnostic system for quick troubleshooting.

LGMG DIESEL RT Scissor Lift

SPECIFICATIONS

MODELS	SR0818E (SR2669E)	
Measurements	Metric	Imperial
Work Height Max.	9.7m	31'10"
A Platform Height - Raised	7.7m	25'3"
B Platform Height - Stowed	1.41m	4'8"
C Platform Length	2.79m	9'2"
D Platform Width	1.6m	5'3"
E Overall Length (with ladder) *	3.11 / 3.76m	10'2"/12'4"
F Overall Width	1.79m	5'10"
G Overall Height - Rails up	2.58m	8'6"
Overall Height - Rails down	1.89m	6'2"
H Extension Deck	1.52m	5'
I Wheelbase	2.29m	7'6"
Ground Clearance-Center	0.23m	9"

PRODUCTIVITY

Max. Platform Occupancy	4 (in) / 4 (out)	
Platform Capacity	680kg	1499 lbs
Platform Capacity - Extension	140kg	310 lbs
Drive Height	Full Height	
Gradeability - Stowed	40%	
Min. Turning Radius	4.75m	15'7"
Raise/Lower Speed	35 / 30s	
Brakes	Rear-wheel brake	
Drive Mode	4x2	
Tire Type	Foam-filled Non-marking	
Tire Size	663x283mm	26"x11"

POWER

Power Source	48V DC 315Ah	
--------------	--------------	--

HYDRAULIC SYSTEM

Hydraulic Oil Volume	50L	13.21gal
----------------------	-----	----------

WEIGHT

Machine Weight with Outriggers (CE/ANSI) **	4190kg	9237 lbs
Machine Weight without Outriggers (CE/ANSI)	3720kg	8201 lbs


* Overall length without outriggers is 3.11m (10'2"), with outriggers is 3.76m (12'4").
 ** Hydraulic outriggers are optional for SR0818E.

STANDARD FEATURES

Proportional control	Emergency stop device
Foldable guardrail	Tilt alarm with lift cut-out
Emergency descent	Overload sensing system
Manual brake release	Intelligent diagnostic system
Oscillating axle	Descent alarm with flashing beacon
Self-lock entry gate	Foam-filled non-marking tires
All motions alarm	

OPTIONAL

AC power to platform	Solid tires
Telematics	Solid non-marking tires
Biodegradable hydraulic oil	Foam-filled tires
Auto-leveling outriggers	

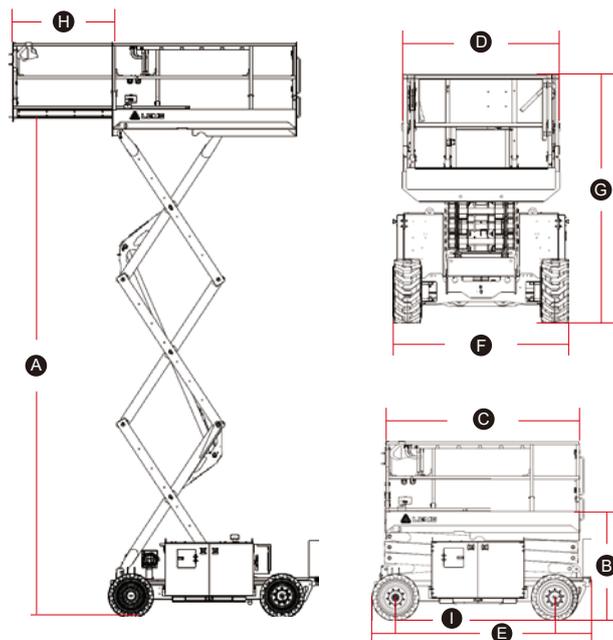

Please contact LGMG or a local dealer for more details.
 LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.
 This brochure comes into effect in May, 2023.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China
 Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands
 Email: sales@lgmgeurope.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
 Email: sales@lgmgna.com Tel: +1 833 288 5464

www.lgmglifts.com

 **LGMG**
 RELIABILITY IN ACTION